

Ref. : RP 5190.pas

Rev. : Initial

Date : 08/10/2007

Page : 1/1

STEEL NEEDLE VALVE PN 200

RP 5190



ISO 9001 : 2000

Certifié par



ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES
INDUSTRIAL VALVES AND ACCESSORIES

APPLICATION


General use : for all kind of fluids.

GENERAL CHARACTERISTICS

- From DN 1/4" to DN 1".

CONSTRUCTION

5	1	Packing	Graphite	
4	1	Packing gland	Carbon steel A105	
3	1	Stem	Stainless steel	
2	1	Bonnet	Carbon steel A105	DIN: GS-C25 ASTM: ASTM A216 Grade WCA BS: 161 Grade B
1	1	Body	Forged carbon steel A105	DIN: GS-C25 ASTM: ASTM A216 Grade WCA BS: 161 Grade B
Pos.	Qty.	Description	Material	

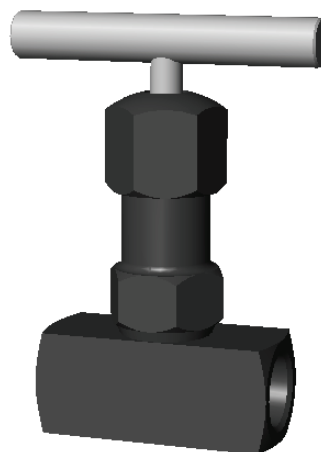

DIMENSIONS

DN		L	H	Weight (kg)
mm	inch			
8	1/4"	60	85	0,64
12	3/8"	60	85	0,62
15	1/2"	70	98	0,83
20	3/4"	75	112	1,04
25	1"	90	134	1,95

WORKING CONDITIONS

Maximum working pressure : 200 bar.

Maximum temperature : +250°C.

Test procedures are established according to standard EN 12266-1, DIN 3230, BS 6755 et ISO 5208 :

-Body : 300 bar.

STANDARDS

BSP threaded according to standard ISO 228-1.

