

Ref. : BS 6260.pas

Rev. : Initial

Date : 31/10/07

Page : 1/1

# 3 PIECES FLANGED BALL VALVE

## BS 6260



ISO 9001 : 2000

Certifié par



ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES  
INDUSTRIAL VALVES AND ACCESSORIES

### APPLICATION


- General use : for currents compatible fluids.

### GENERAL CHARACTERISTICS

- From DN 15 to DN 100.
- Full bore.
- Handle locks on steel.
- Models 3 pieces.
- Flanged PN40.

### CONSTRUCTION

7	1	Stem	Stainles steel 304	
6	1	Body gasket	PTFE + 15% fibre	
5	1	Packing	PTFE + 15% fibre	
4	2	Seat	PTFE + 15% fibre	
3	1	Ball	Stainles steel 316	DIN: G-X6CrNiMo18 10 ASTM: Grade CF8M BS: 316 C16
2	2	Flange	Stainles steel 16	DIN: G-X6CrNiMo18 10 ASTM: Grade CF8M BS: 316 C16
1	1	Body	Stainles steel 316	DIN: G-X6CrNiMo18 10 ASTM: Grade CF8M BS: 316 C16
Pos.	Qty.	Déscription	Material	

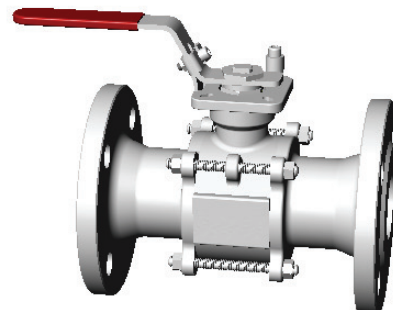

### DIMENSIONS

DN		L	H	P	Weight (kg)
mm	inch				
15	1/2"	130	73,0	1 12,0	2,1
20	3/4"	150	80,8	1 12,0	2,8
25	1"	160	90,5	1 36,0	3,6
32	1" 1/4	180	98,7	1 85,0	5,5
40	1" 1/2	200	115,3	1 97,9	7,3
50	2"	230	124,0	1 98,0	10,0
65	2" 1/2	290	155,0	2 64,0	19,5
80	3"	310	208,5	2 64,0	25,1
100	4"	350	216,7	3 25,0	36,3

### WORKING CONDITIONS

PS max : 40 bar  
T max : + 180 °C

Test procedures are established according to standards  
EN 12266-1, DIN 3230, BS 6755 et ISO 5208 :  
- Body: 60 bar.

### STANDARDS

Face to face according to EN 558-1 serie 1 and  
DIN 3202 /F1.  
Flanges drilled according to EN 1092-1 and  
DIN 2501 : ISO PN40.

