

Ref. : RF 3241.pas

Rev. : B

Date : 22/07/09

Page : 1/1

# BALANCED FLOAT VALVE STRAIGHT TYPE

## RF 3241



ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES  
INDUSTRIAL VALVES AND ACCESSORIES

### APPLICATION


General use : potable water and irrigation.

### GENERAL CHARACTERISTICS

Range : from DN 40 to DN 200.

### CONSTRUCTION

5	1	Float	Stainless steel 304	
4	1	Valve	Stainless steel 304	
3	1	Obturator	Stainless steel 304	
2	1	Cover	Cast iron GG25	DIN : GG25 ASTM : A48 class 40B BS : Grade 250
1	1	Body	Cast iron GG25	DIN : GG25 ASTM : A48 class 40B BS : Grade 250
Pos.	Qty.	Désignation	Matière	

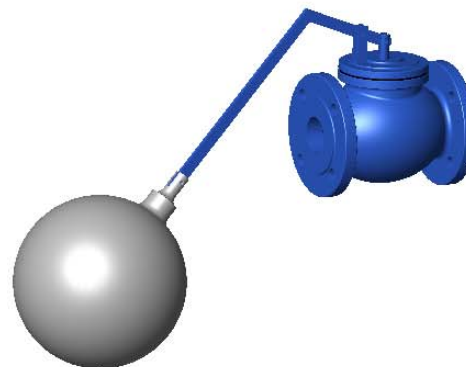

### DIMENSIONS

DN	A	B	L	H	J	Ød	ØD	Øk	Øg	f	b	n x Ød	Weight (kg)
40	1295	1562	180	172	463	270	150	110	88	3	18	18x4	15
50	1295	1562	200	172	463	270	165	125	102	3	20	18x4	17
65	1460	1753	240	305	545	300	185	145	122	3	20	18x4	26
80	1460	1753	260	305	545	300	200	160	138	3	22	18x8	32
100	1537	1892	300	330	546	350	220	180	158	3	24	18x8	38
125	1848	2305	350	340	721	350	250	210	188	3	26	18x8	65
150	1848	2305	400	340	721	400	285	240	212	3	26	22x8	90
200	2146	2998	500	340	907	400	340	295	268	3	26	22x8	160

### WORKING CONDITIONS

T maxi : +70°C

Test procedures are established according to standards EN 12266-1, DIN 3230, BS 6755 and ISO 5208.

### STANDARDS

Flanges drilled according to DIN 2501 and EN 1092-2 : ISO PN16.

