

Ref. : VG3400-004.pas

Rev. : Initial

Date : 25/02/09

Page : 1/2

KNIFE GATE VALVE CAST IRON BODY WITH ISO MOUNTING PLATE FOR CONNECTION

VG3400-004




APPLICATION

General use : Pulp production, water, water treatment, waste water, chemical industry (powdery or crystallizing products), wine-producing, pulverized products (cement work, pneumatic transport, stocking).

GENERAL CHARACTERISTICS

Range : from DN 50 to DN 600.
Function ON/OFF or regulation.
Wafer threaded mounting ISO PN10.
Unidirectional tightness, direction indication thanks to the arrow on the body.
Small retention zone: the gate is guided in the body and has little clearance.
Gland assembly: packing and O-ring (same materials as seat joint) to assure the elasticity and decrease the operating torque.
Small head loss. Possibility to regulate thick fluids with the adaptation of a diaphragm ring.
The range of knife gate valves is conceived to accept normally all the types of electric actuators thanks to its mounting flange of connecting according to the standard ISO 5210.

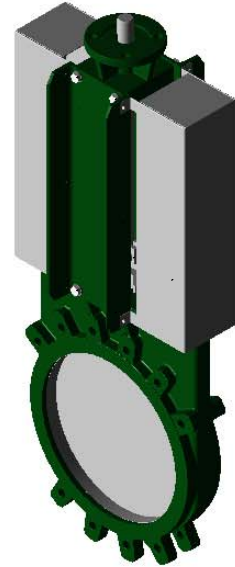


CONSTRUCTION

11	2	Lateral security protection	Stainless steel 304	
10	1	O-ring	EPDM	
9**	1	Support ring	Stainless steel 316	DIN: X5CrNiMo18 10 ASTM: A 182 AISI 316 BS: 970 316 S16
8**	1	Gasket	EPDM	
7	1	Packing gland	Aluminium (DN50-450) Steel (DN500-600)	
6	1	Embase moteur	Painted steel	
5*	2	Plaque support	Steel + Epoxy	
4	1	Vis de manœuvre	Stainless steel 13%Cr	
3	1	Knife	Inox X5CrNi 18-10	DIN: X5CrNi18 10 ASTM: A 182 AISI 304 BS: 1449-2 304 S15
2	2	Packing	PTFE	
1	1	Body	Cast iron EN-GJL-250	DIN: GG25 ASTM: A48 class 40B BS: 1452 Grade 250
Pos.	Qty.	Description	Material	

*Pre-shaped parts up to DN 300.
**Missing parts on metal / metal tightness.

DIMENSIONS

DN	L	H	h	Ø T	Turns number for opening	C	D	Ø K	n	Ø M	ISO Mounting flange	Ø A	Ø B	Ø E	Ø F	Ø G	Ø N	Weight (kg)
50	2"	40	305	36	13	124	83	125	4	4 x M16	F07/F10	70	102	125	9	11	70	7
65	2 1/2"	40	330	43	16	139	83	145	4	4 x M16								9
80	3"	50	355	40	20	154	83	160	8	4 x M16								10
100	4"	50	400	40	25	174	83	180	8	4 x M16								11
125	5"	50	438	38	31	189	93	210	8	4 x M16	16							
150	6"	60	489	40	38	220	93	240	8	4 x M20	20							
200	8"	60	608	50	40	275	108	295	8	4 x M20	36							
250	10"	70	700	48	50	326	108	350	12	8 x M20	50							
300	12"	70	807	50	60	380	108	400	12	8 x M20	61							
350	14"	96	910	45	58	450	290	460	16	10 x M20	112							
400	16"	100	1020	53	67	510	290	515	16	10 x M24	142							
450	18"	106	1115	63	75	564	290	565	20	14 x M24	182							
500	20"	110	1225	53	83	630	290	620	20	14 x M24	217							
600	24"	110	1429	50	100	726	290	725	20	14 x M27	261							

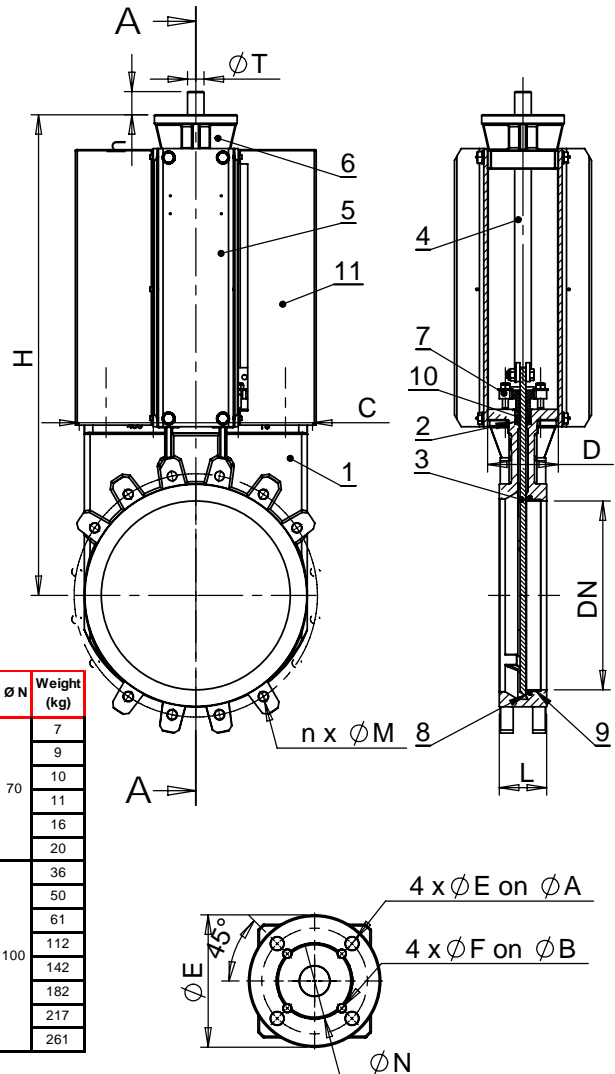

Ref. : VG3400-004.pas

Rev. : Initial

Date : 25/02/09

Page : 2/2

KNIFE GATE VALVE CAST IRON BODY WITH ISO MOUNTING PLATE FOR CONNECTION

VG3400-004



ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES
INDUSTRIAL VALVES AND ACCESSORIES

WORKING CONDITIONS

Maximum working pressure : DN 50-250 : 10 bar.
DN 300-450 : 7 bar.
DN 500-600 : 4 bar.

Maximum temperature : -10°C / +80°C (Standard tightness).

Others materials on request (If marked)	Maximum temperature	
Metal / metal	T max : -10°C / +200°C.	<input type="checkbox"/>
White nitril	T max : -10°C / +80°C.	<input type="checkbox"/>
EPDM	T max : -20°C / +130°C.	<input type="checkbox"/>
Silicone	T max : -20°C / +170°C.	<input type="checkbox"/>
FPM (Type Viton®)	T max : -10°C / +170°C.	<input type="checkbox"/>
PTFE	T max : +4°C / +170°C.	<input type="checkbox"/>
CSM (Type Hypalon®)	T max : +4°C / +80°C.	<input type="checkbox"/>



Standard tightness



Tightness metal/metal

STANDARDS

Manufacture according to the requirements of the European directive 97/23/CE "Equipments under pressure" : category III modulate H.

Test procedures are established according to standards EN12266-1, DIN 3230, BS 5154 and ISO 5208.

Connections between flanges according to standard EN 1092-2 et DIN 2501 : ISO PN10.